1. CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL BUIDLING CODES. PERMIT SHALL BE POSTED IN A VISIBLE PLACE AT ALL TIMES.

2. AL WORK, MATERIALS AND EQUIPMENT UTILIZED IN THIS PROJECT SHALL BE INSTALLED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND SPECIFICATIONS.

3. ALL WORK FOR THIS PROJECT SHALL CONFORM TO STANDARDS PUBLISHED BY RECOGNIZED PROFESSIONALS AND INDUSTRY ORGANIZATIONS.

4. CONTRACTOR SHALL BE RESPONSIBLE FOR VISITING THE SITE PRIOR TO BIDDING AND FAMILIARIZING HIMSELF WITH ALL EXISTING CONDITIONS AFFECTING THE WORK, INCLUDING BUT NOT LIMITED TO PRIVATE AND PUBLIC UTILITIES, ON AND OFF SITE, ACCESS ROADS, WATERWAYS AND OTHER SUPPORT FACILITIES.

5. CONTRACTOR TO VERIFY LOCATION OF ALL ELECTRICAL, WATER, GAS, SEPTIC TANK, OR ANY OTHER UTILITY LINES ENCOUNTERED DURING CONSTRUCTION.

6. CONTRACTOR MUST NOTIFY ARCHITECT IMMEDIATELY OF ANY UNEXPECTED OR UNKNOWN CONDITIONS, DISCREPANIES IN THE DRAWINGS AND CONTRACTO DOUCMENTS, ANY ERRORS OR OMISSIONS ON THE DRAWINGS IN THE FIELD PRIOR TO PROCEEDING WITH WORK OR SHOP FABRICATION.

7. CONTRACTOR SHALL NOTIFY ARCHITECT FOR CLARIFICATION PRIOR TO BIDDING OF ANY DISCREPANCIES BETWEEN ARCHITECTURAL, MECHANICAL, STRUCTURAL, PLUMBING AND ELECTRICAL DRAWINGS. ANY DISCREPANIES DISCUSSED AFTER BIDDING SHALL BE INTERPRETED AS IF IT WAS BID BASED ON THE MOST EXPENSIVE METHOD OF FINISH.

8. CONTRACTOR AND SUBCONTRACTORS SHALL REVIEW ALL THE CONTRUCTION DOCUMENTS AND SPECIFICATIONS AND ISSUE ALL REQUESTS FOR INFORMATION (RFI) PRIOR TO THE AWARDING OF THE CONTRACT. ANY RFI ISSUED AFTER THE CONTRACTOR AWARDED CANNOT BE USED AS A BASE FOR A FINANCIAL OR TIME DELAY CLAIM.

9. CONTRACTOR TO OBTAIN WRITTEN APPROVAL FROM OWNER OR ARCHITECT PRIOR TO ANY CHANGES OR DEVIATION FROM CONTRACT DOCUMENTS.

10. UNDER NO CIRCUMSTANCES WILL ASSUMPTIONS BY THE CONTRACTOR OR SUBCONTRACTOR BE CONSIDERED THE DESIGN INTENT OR APPROVAL OF THE ARCHITECT OR ENGINEER UNLESS THERE IS WRITTEN APPROVAL BY THEM.

11. CONTRACTOR SHALL PREPARE AND MAINTAIN ALL CONSTRUCTION AREAS, AS WELL AS SURROUNDING AREAS FREE OF DEBIS OR HAZARDOUS EQUIPMENT.
CONTRCTOR SHALL BE RESPONSIBLE FOR THE REPAIR AND/OR THE REPLACEMENT OF ANY EQUIPMENT DAMAGED DURING CONSTRUCTION OR CLEAN-UP. CONSTRUCTION PERSONNEL SHALL BE CONFINED TO THE LIMITS OF THE CONSTRUCTION AREA. ALL OSHA REGULATIONS FOR CONSTRUCTION AREAS SHALL BE STRICTLY FOLLOWED.

12. DRAWINGS ARE NOT TO BE SCALED. DIMENSIONS SHALL BE FOLLOWED. CONTRACTOR SHALL CONTACT THE ARCHITECT FOR ANY CLARIFICATION OR DIMENSIONS REQUIRED AND ARE NOT PROVIDED INT HE CONTRACT DOCUMENTS.

13. ALL DIMENSIONS ARE BASED ON NOMINAL SIZES OF MEMBERS AND ARE GIVEN TO THE OUTER FACE OF SUCH MEMBERS, NOT TO FACE OR FINISH MATERIAL UNLESS OTHERWISE NOTED ON DRAWINGS.

14. CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR APPROVAL BEFORE COMMENCING FABRICATION AND/OR INSTALLATION OF ALL APPLICABLE ITEMS OF CONSTRUCTIN. ALL SHOP DRAWING DIMENSIONS SHALL BE FIELD VERIFIED, REVIEWED AND APPROVED BY CONTRACTOR BEFORE SUBMITTAL. INCCOMPLETE SHOP DRAWINGS OR LACKING SUFFICIENT INFORMATION WILL BE RETURNED WITHOUT REVIEW. SPECIALTY ENGINEERING SHOP DRAWINGS SHALL BE SIGNED AND SEALED BY A FLORIDA REGISTERED PROFESSIONAL ENGINEER.

15. THE CONTRACTOR SHALL BE AWARE THAT SPECIFIC FIRE RATED SEPARATION WITHIN THE BUILDNGS CONSTRUCTION ARE REQUIRED BY CODE. THE USE OF SPECIFIC MATERIALS AND COMBINATIONS OF MATERIALS WITHIN FIRE RATED ASSEMBLYTS AS CALLED FOR ON THE DRAWINGS AND SPECIFICATIONS ARE FOR THE PURPOSE OF ACHEIVING THOSE REQUIRED FIRE SEPARATION. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THAT THE CHANGE IN MATERIAL THAT ARE REQUESTED BY OR MADE BY THE CONTRACTOR AND/OR ITS SUBCONTRACTORS, FROM THOSE MATERIALS DRAWN OR SPECIFIED, DOES NOT IN ANY WAY AFFECT OR LESSEN THE REQUIRED FIRE RATED CONSTRUCTION OR ASSEMBLY.

16. WHERE CMU IS INDICATED TO HAVE A SPECIFIC HOURLY RIRE RATING THIS SHALL BE TAKEN AS THE MINIMUM ALLOWED.

17. ALL WOOD FRAMING INCLUDING PLYWOOD WHICH IS CONCEALED WITHIN WALLS OR CEILGINS OR USED FOR SUPPORT OF WALLS OR CEILINGS MUCH BE FIRE RETARDANT, PRESSURE TREATED WOOD AND MUST BE USED WHERE IN CONTACT WITHI CONCRETE OR MASONRY.

ALL PIPING SHALL BE SLEEVED THROUGH SLAB. CONTRACTOR TO FULLY SEAL SPACE AROUND PIPES WITH AN 2-HOUR UL APPROVED FIRE RESISTIVE "THERMAFIBER" GLASS FIBER SAFING INSULATION AS MANUFACTURERED BY US. GYPSUM CO. COMPLYING WITH ASTM E-119 OR APPROVED SIMILAR. PENETRATIONS THROUGH FIRE RATED WALLS OR FLOOR SYSTEM SHALL BE PROTECTED AS TO MAINTAIN THE FIRE RATING OR SAID WALL.

19. ALL SHAFTS WHERE APPLICABLE TOBE 2-HOUR RATED WITHOUT EXCEPTION, UL DESIGN NO U-505 OR APPROVED SIMILAR AND SHALL CONTINUE AS SUCH TO UNDERSIDE OF ROOF OR FLOOR STRUCTURAL DECKING.

20. GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATION OF ELECTRICAL BOXES WITH CABINET MANUFACTURER AND ELECTRICAL SUBCONTRACTOR.

21. CONTRACTOR TO SUBMIT A MINIMUM OF FIVE (5) SETS OF COMPLETE SHOP DRAWINGS OR AS SUBMITTLAS FOR APPROVAL BEFORE COMMENCING FABRICATION AND/OR INSTALLATION OF ALL APPLICABLE ITEMS OF CONSTRUCTION. RE-REVIEW BY ARCHITECT OR ENGINEER REQUIRED BY SUBMITTAL NOT EVALUATED AND APPROVED BY CONTRACTOR SHALL BE PAID FOR BY THE CONTRACTOR ON HOURLY RATES ESTABLISHED IN ARCHITECT CONTRACT FOR SERVICES FOR THE PROJECT.

22. CONTRACTOR SHALL HAVE CONTRACTED ALL SUBCONTRACTORS AND VENDORS PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. ALL SHOP DRAWINGS SHALL BE SUBMITTED BY THE CONTRACTOR NO LATER THAN 30 DAYS AFTER THE START DATE OF CONSTRUCTION.

23. CONTRACTOR TO FURNISH AND INSTALL ALL METAL AND WOOD BLOCKING REQUIRED FOR ALL WALL MOUNTED OR BRACED FIXTURES, MILLWORK, SHELVES, BATHROOM FIXTURES AND BATHROOM ACCESSORIES OR BY OTHER ITEMS DESCRIBED IN INTERIOR DESIGN AND ARCHITECTURAL DRAWINGS.

24. CONTRACTOR TO PROVIDE CONTINUOUS WOOD BLOCKING AT ALL INTERIOR PARTITION FOR INSTALLATION OF BASE BOARDS. COORDINATION PLACEMENT HEIGHTS WITH LOCATION OF BASE BOARDS.

25. FOR ALL BATHROOMS PROVIDE WOOD BLOCKING IN SHOWERS AND BEHIND TOILETS FOR GRAB BARS AS REQUIRED.

26. IN ADDITION TO WALL TYPES SHOWN ON PLANS, THE CONTRACTOR SHALL REFER TO THE ROOM FINISH SCHEDULE, INTERIOR ELEVATIONS AND DETAILS FOR ADDITIONAL INFORMATION REGARDING FINISHES.

27. CONTRACTOR SHALL COORDINATE WITH MECHANICAL AND ELECTRICAL CONTRACTORS THE LOCATION OF ALL ACCESS PANELS SO AS TO ALLOW FOR PROPER EQUIPMENT ACCESSIBILITY, MAINTENANCE AND/OR FOR PROPER OPERATION OF THE BUILDING SYSTEMS. THE OMISSION OF ANY OR ALL ACCESS PANELS DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY FROM PROVIDING AND INSTALLING SUCH PANELS OR DOORS.

28. CONTRACTOR TO PROVIDE ACCESS PANELS FOR ALL A/C FIRE DAMPERS.

29. CONTRACTOR SHALL PAINT ALL VISIBLE SURFACES OF FACTORY PRIMED OR FACTORY PAINT FINISHED EQUIPMENT, A/C GRILLS OR REGISTERS, COVERS ETC. UNLESS SPECIFICALLY NOTED OTHERWISE VERIFY AND COORDINATE COLORS WITH INTERIOR DESIGNER, ARCHITECT OR OWNER.

30. BEFORE INSTALLATION, THE CONTRACTOR SHALL COORDINATE WITH THE ARCHITECT THE EXACT MOUNTING LOCATION OF ALL SWITCHES, WALL RECEPTACLES, PLUGS, THERMOSTATS AND OTHER WALL MOUNTED FIXTURES.

31. ALL INTERIOR AND EXTERIOR JOINTS BETWEEN DISSIMILAR MATERIALS OR FINISHES SHALL RECEIVE A BEAD OF CAULKING TO MATCH COLOR OF ADJACENT SURFACE. COORDINATE COLORS WITH ARCHITECT OR OWNER.

32. CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING ALL DEBRIS AND CONSTRUCTION MATERIAL FROM THE SITE. CONTRACTOR SHALL ALSO BE RESPONSIBLE FOR PROPERLY CLEANING ALL AREAS PRIOR TO FINAL ACCEPTANCE BY THE OWNER INCLUDING BUT NOT LIMITED TO WINDOWS, STOREFRONT, FLOORS, CARPETS, WALLS, DOORS ETC.

33. UPON COMPLETION OF THIS PROJECT, THE GENERAL CONTRACTOR SHALL GIVE THE OWNER A COMPLETE SET OF "AS-BUILT" ARCHITECTURAL, MECHANICAL, ELECTRICAL AND FIRE PROTECTION DRAWINGS ALONG WITH THE WRITTEN GUARANTEE, OPERATION AND MAINTENANCE MANUALS OF ALL EQUIPMENT AND FINISHES INSTALLED. THE GENERAL CONTRACTOR SHALL MAINTAIN A CURRENT SET OF "AS-BUILT" DRAWINGS. INFORMATION SHALL BE RECORDED BY THE GENERAL CONTRACTOR AS CONSTRUCTION PROGRESSES. UPON FINAL COMPLETION OF THE PROJECT, THE GENERAL CONTRACTOR SHALL ISSUE AN "AS-BUILT" SET OF DRAWINGS AND DOCUMENTS TO THE OWNER, ALONG WITH AN AFFIDAVIT CERTIFYING THAT TO THE BEST OF HIS KNOWLEDGE AND BELIEF THESE "AS-BUILT" DRAWINGS AND DOCUMENTS WERE USED IN THE CONSTRUCTION OF THIS PROJECT AND REFLECT THE "AS-BUILT" CONDITIONS.

34. THE CONTRACTOR AND ALL SUBCONTRACTORS AND SUPPLIERS SHALL GRANT TO THE OWNER/DEVELOPER AND INSTITUTIONAL MORTGAGEE, IMPLIED WARRANTIES OF FITNESS AS TO THE WORK PERFORMED OR MATERIALS SUPPLIED BY THEM AS FOLLOUS: A) FOR THE PERIOD OF FIVE YEARS FROM THE DATE OF COMPLETION OF A BUILDING OR IMPROVEMENTS WARRANTY AS TO THE MECHANICAL AND PLUMBING ELEMENTS, B) FOR A PERIOD OF THREE YEARS AFTER COMPLETION OF THE BUILDING OR IMPROVEMENT A WARRANTY AS TO ALL OTHER IMPROVEMENTS AND MATERIALS AND C) AS TO THE PERSONAL PROPERTY A WARRANTY WHICH IS FOR THE SAME PERIOD AS THAT PROVIDED BY THE MANUFACTURER OF THE PROPERTY COMMENCING WITH THE DATE OF POSSESSION OF THE BUILDING.

35. COMPLETION OF A BUILDING OR IMPROVEMENT MEANS FINAL COMPLETION OF CONSTRUCTION, FINISHING, AND EQUIPPING OF THE BUILDING OR IMPROVEMENT ACCORDING TO THE PLANS AND SPECIFICATIONS AND THE ISSUANCE OF A CERTIFICATE OF OCCUPANCY FOR THE ENTIRE BUILDING OR IMPROVEMENT OR THE EQUIVALENT AUTHORIZATION BY THE GOVERNMENTAL BODY HAVING JURISDICTION. THE WARRANTIES PROVIDED HEREIN SHALL INSURE TO THE BENEFIT OF THE OWNER AND ITS SUCCESSOR TO THE BENEFIT OF THE OWENR/DEVELOPER AND TO THE BENEFIT OF THE INSTITUTIONAL MORTGAGEE.

36. PURSUANT TO THE APPROVAL BY THE CITY COMMISSION AND ALL OTHER OUTSIDE AGENCIES, THE PLANS FOR THIS PROJECT SHALL BE SUBMITTED TO THE BUILDING DIVISION OF THE CITY OF BOYNTON BEACH FOR REVIEW AT THE TIME OF PERMIT APPLICATION SUBMITTAL. THE PLANS SHALL INCORPORATE ALL THE CONDITIONS OF APPROVAL AS LISTED IN THE DEVELOPMENT ORDER AND APPROVED BY THE CITY COMMISSION.

37. TWO INDEPENDENT SOURCES OF WATER, AS WELL AS A LOOPED SYSTEM, MUST BE PROVIDED DURING ALL PHASES OF CONSTRUCTION. NO EXCEPTIONS TAKEN.

38. PVC MATERIAL SHALL NOT PERMITTED ON THE CITY'S WATER SYSTEM. ALL LINES SHALL BE DIP.

39. CONSTRUCTION ACTIVITY IS REGULATED BY CITY CODE CHAPTER 54. CONTRACTOR SHALL MAINTAIN JOB SITE EROSION AND SEDIMENTATION CONTROL IN ACCORDANCE WITH PERMIT CONDITIONS AND APPLICABLE REGULATIONS.

40. PRIOR TO ISSUANCE OF BUILDING PERMIT A STORMWATER POLLUTION PREVENTION PLAN (SWPPP) SHALL BE REQUIRED. THE SWPPP MUST BE MAINTAINED AT THE JOB SITE AT ALL TIMES. THE SWPPP SHALL CONTAIN DETAILED DESCRIPTIONS OF STRUCTURES, PROCEDURES, CONTACT NAMES AND OR CONTROL MEASURES DESIGNED TO REDUCE SEDIMENT AND STORMWATER RUNOFF.

41. CONSTRUCTION SITES AND OPERATIONS SHALL BE REQUIRED TO MAINTAIN DURING AND AFTER ALL DEMOLITION CONSTRUCTION, DEVELOPMENT EXCAVATION, DEWATERING, AND/OR ALTERATION OPERATIONS STRUCTURAL ND NON STRUCTURAL BEST MANAGEMENT PRACTICES (BMP'S) WITH THE INTENT TO REDUCE POLLUTANTS AND SEDIMENT IN STORMWATER RUNOFF.

1 GENERAL NOTES

AIR CONDITIONING	A/C
AIR HANDLING UNIT	A.H.U.
ALTERNATE	ALT.
ALUMINUM	AL.
ABOVE FINISH FLOOR	A.F.F.
ANGLE	∠
AT	@
ACOUSTICAL TILE	A.T.
Architect/Engineer	ARCH
ACCESS PANEL	A.P.
BEAM	BM.
BAR JOIST	B.J.
BLOCKING	BLKG.
BOARD	BD. / BRD.
BOTTOM	BOT.
BUILDING	BLDG.
BRICK	BRK.
BOTH SIDES	B.S.
BUILT UP ROOFING	B.U.R.
CABINET	CAB.
CEILING	CLG.
CEILING JOISTS	CLG. JST.
CEMENT	CEM.
CENTER LINE	℄
CERAMIC TILE	CER. T.
CHAMFER	CHAM.
CHANNEL	[OR]
CLEAR	CLR.
COLUMN	COL.
COMPOSITION	COMPO.
CONCRETE BLOCK	CONC. BLK.
CONSTRUCTION GRADE	CONST. GR.
CONTINUOUS	CONT.
COLD WATER	C.W.
CULTURED MARBLE	CULT. MAR.
CEILING	CLG
CONCRETE MASONRY UNIT	CMU
CERAMIC TILE	C.T.
COUNTER	CTR
DETAIL	DTL.
DIAMETER	DIA.
DISHWASHER	D.W.
DOUBLE	DBL.
DOUBLE PLATE	DBL. PL.
DOOR	DR.
DOWN	DN.
DOWNSPOUT	D.S.
DRAWER	DWR.
DISPENSER	DISP.
DAMP PROOFING MEMBRANE	D.P.M.
DRYWALL	D.W.
ELECTRICAL	ELEC
EXPANSION	EXP
EACH	EA.
ELEVATION	ELEV/EL.
EQUAL	EQ.
EXHAUST	EXH.
EXPANSION JOINT	EXP. JT.
EXTERIOR	EXT.
ETCETERA	ETC.
FACE OF MASONRY	F.O.W.
FLOOR	F.O.S.
FLORIDA BUILDING CODE	F.B.C.
FINISH	FIN.
FINISH FLOOR	FF.
FINISH GRADE	F.G.
FLASHING	FLSH'G
FLOOR	FLR.
FLOOR DRAIN	F.D.
FLOOR JOISTS	FLR. JST.
FLUORESCENT	FLUOR.
FOOTING	FTG.
FIRE EXTINGUISHER	F.E.
FIRE EXTINGUISHER CABINET	F.E.C.
FIXTURE	FIXT.
FURRING	FUR.
FIELD VERIFY	F.V.
GRAB BAR	G.B.
GALVANIZED	GALV.
GRADE	GRD.
GYPSUM BOARD	GYP.
GLASS	GL.

HEADER	HDR.
HEIGHT	HT. / HGT.
HOSE BIBB	H.B.
HOLLOW METAL	H.M.
HANDICAP	H.C.
HOT WATER	H.W.
INFORMATION	INFO.
INSULATION	INSUL.
INTERIOR	INT.
JOINT	JT.
JOIST	JST
KNOCK OUT	K.O.
KNEE SPACE	K.S.
LAMINATED PLASTIC	LAM. PLAS.
LOUVER	LOUV.
LUMINOUS	LUM.
LAVATORY	LAV.
LIGHT WEIGHT	L.W.
MACHINE BOLT	MB.
MANUFACTURER	MFGR.
MATERIAL	MATL.
MAXIMUM	MAX.
MEDICINE CABINET	M.C.
METAL	MTL.
MINIMUM	MIN.
MASONRY	MAS.
MARBLE	MBL
MANUFACTURER	MFR.
MIRROR	MIRR.
MISCELLANEOUS	MISC
MASONRY OPENING	M.O.
NOT IN CONTRACT	N.I.C.
NOT TO SCALE	N.T.S.
NOT APPLICABLE	N/A
NUMBER	NO.
OBSCURE	OBS.
OPPOSITE	OPP.
ON CENTER	O.C.
OVERHANG	O.H.
PAIR	PR.
PENNY	d
PLATE	PL.
PLYWOOD	PLY.WD.
PROPERTY LINE	P.
POUNDS PER SQUARE INCH.	P.S.I.
PRESSURE TREATED	P.T.
PARTITION	PART
PRECUTS	P.C.
PLASTER	PLAS.
PANEL	PNL
PRE ENGINEERED	PREENG
PREFABRICATED	PREFAB
PAPER TOWEL DISPENSER	P.T.D.
RADIUS	RAD.
RAFTER	RAF.
REQUIRED	REQD
REVISION	REV.
REFRIGERATOR	REF.
RISER	R.
ROOF DRAIN	R.D.
ROOM	RM.
ROUGH SAWN	RO/S
ROUGH OPENING	R.O.

SELECT STRUCTURAL	SELECT STRUCT.
SOLID CORE	S.C.
SHELF AND POLE	S & P
SIMILAR	SIM.
SLIDING GLASS DOOR	SL. GL. DR.
SLOPING CEILING	SLP. CLG.
SPLASH	SPL.
SHEATHING	SHTG.
SYNTHETIC MARBLE	SYN. MARBLE
SOAP DISPENSER	S.D.
SQUARE FEET	S.F. (SQFT.)
SHELF	SH
SHEET	SHT
SLIDING GLASS DOOR	S.G.D.
STAINLESS STEEL	S.S.
STANDARD	STD
STEEL	STL.
SUSPENDED	SUSP.
TOILET PAPER DISPENSER	T.P.D.
TEMPERED GLASS	TEMP. GL.
TIE BEAM	T.B.
TOP OF CURB	T.C.
TREAD	T.
TYPICAL	TYP.
TONGUE AND GROOVE	T&G
TOP OF PLATE	T.O.P.
TOP OF BEAM	T.O.B.
UNLESS NOTED OTHERWISE	U.N.O.
VENT THRU ROOF	V.T.R.
VENT TO OUTSIDE AIR	V.T.O.S.A.
VERTICAL	VERT.
VINYL COMPOSITION TILE	V.C.T.
WARDROBE	WARD.
WATER CLOSET	W.C.
WATERPROOFING	W.P.
WELDED WIRE MESH	W.W.M.
WINDOW	WIND
WITH	W/
WITHOUT	W/O
WOOD	WD.
WROUGHT IRON	W.I.
WALK IN CLOset	W.I.C.

2 ABBREVIATIONS

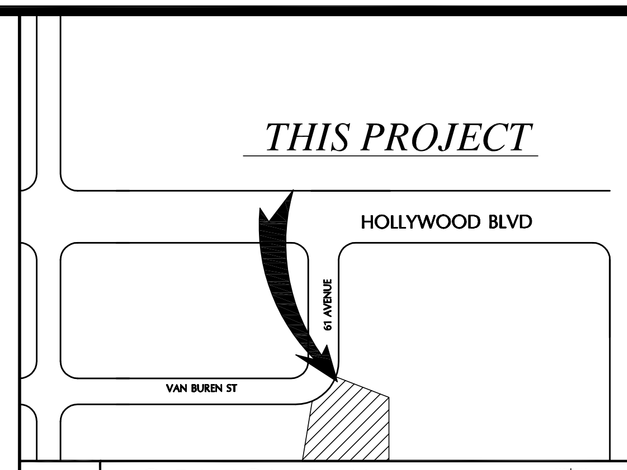

3 LOCATION PLAN

SCALE = N.T.S.

NORTH

CALL 48 HOURS BEFORE YOU DIG IN FLORIDA

IT'S THE LAW

1-800-432-4770

SUNSHINE STATE ONE CALL OF FLORIDA, INC.

ALL PRODUCTS AND THEIR INSTALLATION SPECIDIED IN HESE DOCUMENTS SHALL HAVE PRODUCT APPROVAL BY AND BE ACCORDING WITH THE STANDARDS OF QUALITY, PROTECTION AND PERFORMANCE OF AT LEAST ONE OF THE FOLLOWING AGENCIES AS APPLICABLE:

ASTM -	AMERICAN SOCIETY TESTING MATERIALS
ACI -	AMERICAN CONCRETE INSTITUTE
AFPA -	AMERICAN FOREST & PAPER ASSOCIATION
AISC -	AMERICAN INSTITUTE OF STEEL CONSTRUCTION
AWI -	AMERICAN WOODWORK INSTITUTE
AWPB -	AMERICAN WOOD PERSERVATIVES BUREAU
ANSI -	AMERICAN NATIONAL STANDARDS INSTITUTE
AAMA -	ARCHITECTURAL ALUMINUM MANUFACTURERS ASSOCIATION
DCPA -	(MIAMI) DADE PRODUCT APPROVAL
FBC -	FLORIDA BUILDING CODE
GA -	GYPSUM ASSOCIATION
LSC -	LIFE SAFETY CODE
NER -	NATIONAL EVALUATION SERVICE INC
NFPA -	NATIONAL FIRE PROTECTION ASSOCIATION
NDS -	NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION
OSHA -	OCCUPATIONAL SAFETY AND HEALTH ACT
SJI -	STEEL JOIST INSTITUTE
TCA -	TILE COUNCIL OF AMERICA
UL -	UNDERWRITERS LABRATORIES
WH -	WARNOCK HERSEY INTERNATIONAL

4 PERFORMANCE STANDARDS

MANUFACTURERS, SUPPLIERS OR INSTALLERS OF THE FOLLOWING ITEMS SHALL SUBMIT DETAILED FABRICATION AND INSTALLATION DRAWINGS AND /OR PRODUCT LITERATURE TO THE ARCHITECT FOR THEIR RECORDS AND APPROVAL PRIOR TO THE FABRICATION OR INSTALLATION. DRAWINGS FOR ENGINEERED PRODUCTS OR PRODUCTS OF A STRUCTURAL SAFETY NATURE SHALL BEAR THE SEAL AND SIGNATURE OF A FLORIDA REGISTERED ENGINEER OR SHOW REFERENCE TO PRODUCT APPROVAL BY THE APPLICABLE AUTHORITY. IF THE ARCHITECT'S REVIEW OF SUCH DRAWINGS IS REQUESTED (CLIENT'S CONTRACT OPTION), THEY SHALL BE SUBMITTED IN REPRODUCIBLE FORM. SUCH REVIEW IS SOLELY FOR COMPLIANCE WITH THE INFORMATION GIVEN IN THESE DOCUMENTS AND WITH THE INTENT OF THE DESIGN CONCEPT OF THE PROJECT. RESPONSIBILITY FOR THE ACCURACY AND COORDINATION WITH OTHER TRADES AS WELL AS THE PERFORMANCE OF THE PRODUCTS REMAINS SOLELY WITH THE MANUFACTURER AND/OR THE GENERAL CONTRACTOR AS APPLICABLE. REFER TO PERFORMANCE STANDARDS FOR PRODUCT APPROVAL/COMPLIANCE.

SHOP DWGS TO BE REVIEWED AND APPROVED BY CITY.

1. STEEL REINFORCING
2. STRUCTURAL COLUMNS AND ACCESS
3. PRE-ENGINEERED TRUSSES
4. WATERPROOFING MEMBRANES
5. INSULATION
6. RAILINGS AND HANDRAILS
7. DECORATIVE MOLDINGS/TRIM
8. BATHROOM ACCESSORIES
9. CABINETS
10. AIR CONDITIONING EQUIPMENT
11. WINDOWS, DOORS AND HARDWARE
12. FIREPLACES
13. PLUMBING FIXTURES
14. ELECT. EQUIP AND FIXTURES
16. APPLIANCES
17. FABRICATED STAIRS
18. IRON GATES/FINIALS AND DECORATIVE FIXTURES

5 SHOP DRAWING SCHEDULE

WALL SECTIONS
SECTION NUMBERS
SHEET NUMBER (WHERE SECTION IS DRAWN)

BUILDING SECTIONS
SECTION LETTERS
SHEET NUMBER (WHERE SECTION IS DRAWN)

DETAIL NUMBER
SHEET NUMBER

INTERIOR ELEVATION(S) (UNFOLD)
ARROWS INDICATE ELEVATIONS
SHEET NUMBER

INTERIOR DOOR TYPE
DOOR MARK (NUMBER)

EXTERIOR DOOR/WINDOW TYPE
WINDOW MARK (LETTER)

H# HEADER KEYNOTE
DRAWING NOTE (NUMBER)
SEE SHT A-5 FOR SCHEDULE

KEYNOTE
DRAWING NOTE (NUMBER)
SEE ELEVATIONS

M MOLDING KEYNOTE
DRAWING NOTE (NUMBER)
SEE SHT A-9 FOR SCHEDULE

CONTROL OR DATUM POINT
DESCRIPTION OF POINT
(FINFLR, TOP OF PLATE, TOP OF T.B.)

ELEVATION OR POINT

REVISION REFERENCE
NUMBER OF REVISION CORRESP. TO
DESIGN SECTION OF TITLE BLOCK

STEP DOWN
CHANGE IN ELEVATION

EXTERIOR LIGHT FIXTURE
L.F.

6 SYMBOLS

EXTERIOR WALLS SHOWN ARE DIMENSIONED TO EXTERIOR FACE OF MASONRY OR TO EXTERIOR FACE OF PLYWOOD SHEATHING. SEE SHT A-7.1 FOR ALL WALL TYPE DETAILS

INTERIOR PARTITION - 1/2" GYP BOARD BOTH SIDES ON 3-5/8" MTL STUDS @ 16" O.C. (U.O.N.)

INTERIOR PARTITION - 1/2" GYP BOARD BOTH SIDES ON 6" MTL STUDS @ 16" O.C

INTERIOR PARTITION W/SOUND ATTENUATION BATT INSULATION

1/2" GYP BOARD ON GALV MTL OR P.T. FURRING CHANNELS ON 8" C.M.U. WALL THICKNESS PER PLAN. STUCCO EXTERIOR AS NOTED ON PLANS. SEE STRUCT DWGS FOR FILLED CELL LOCATION AND DTLS

SKIM COAT PLASTER ON INTERIOR AT GARAGE ON 8" CMU WALL (THICKNESS PER PLAN) STUCCO EXTERIOR AS NOTED ON PLANS

POURED CONC WALL OR COLUMN - SIZE AND THICKNESS AS PER STRUCTURAL DWGS.

7 WALL TYPE LEGEND

BUILDING CODES APPLICABLE TO PROJECT:

FLORIDA BUILDING CODE 2007
NATIONAL FIRE PROTECTION CODE
NFPA 101: LIFE SAFETY CODE 1997 EDITION
NFPA 1 FIRE PREVENTION CODE 1997 ED
FLORIDA FIRE PREVENTION CODE 2007 ED
NATIONAL ELECTRIC CODE 1996 EDITION
FLORIDA ACCESSIBILITY CODE FOR BUILDING CONSTRUCTION OCT 1997 EDITION
CITY OF HOLLYWOOD CHAPTER 54 AND ULDR

BUILDING DATA:
ACTUAL BUILDING SQUARE FOOTAGE GROSS 4,436 SF

BASIC WIND SPEED (MPH) 140 - EXPOSURE C

SEE SHT A-0.1 FOR ADDITIONAL BUILDING DATA

ALL WORK TO BE DONE IN ACCORDANCE W/THE 2007 FLORIDA BUILDING CODE AND 2009 AMENDMENTS (TYP)

8 APPLICABLE CODES

I D G S

IN-SITE DESIGN GROUP INC
1609 RODMAN STREET
HOLLYWOOD, FLORIDA 33020
AA26001758
954 921 5333
FAX 954 921 6769
PROJECT COORDINATOR:
ANNIE CARRUTHERS
CGC 1511058
ARCHITECT
SAMUEL R. UCCELLO

SEAL
STATE OF FLORIDA LICENSE No AR-0015597

THESE DESIGNS AND DRAWINGS ARE THE COPYRIGHTED PROPERTY OF IN-SITE DESIGN GROUP, INC. AND MAY NOT BE REPRODUCED EXCEPT WITH SPECIFIC WRITTEN CONSENT OF THE COMPANY. THE CONTACTOR MUST CHECK AND VERIFY ALL DIMENSIONS OF THE JOB AND BE RESPONSIBLE FOR RAPIE REPORTING ANY DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCEMENT OF WORK. DRAWINGS ARE NOT TO BE SCALED.

NEW LIFE PENTECOSTAL CHURCH MIRACLE CENTER

ADDRESS:
6136 VAN BUREN STREET
HOLLYWOOD, FL

REVISIONS
JUNE-6-11
SUBMITTAL TO TECHNICAL ADVISORY COMMITTEE

Date Of Issue
JUNE-6-11

GENERAL NOTES

SP-1.2