DISPOSITION CHART							
OAKWOOD PLAZA SHOPPING CENTER - SPORTS AUTHORITY AREA							
TREE NO.	BOTANICAL NAME	COMMON NAME	нт	SPR	CAL INS.	CONDITION	DISPOSITIO
1	Quercus viginiana	Live Oak	30'	25'	16	Fair	REMAIN
2	Quercus ssp.	Oak	40'	20'	16	Fair	demo
3	Quercus ssp.	Oak	40'	20'	16	Fair	demo
<u>4</u>	Quercus ssp.  Quercus ssp.	Oak	40'	25'	16	Fair	demo
5 6	Quercus ssp.	Oak Oak	20'	20' 20'	12 10	Fair Fair	demo
7	Quercus ssp.	Oak	20'	20'	10	Fair	demo
	Sabal palmetto	Cabbage Palm	10' ct	10'	8	Good	RELOCATE
9	Sabal palmetto	Cabbage Palm	14' ct	10'	12	Good	RELOCATE
10	Sabal palmetto	Cabbage Palm	16' ct	10'	10	Good	RELOCATE
11	Sabal palmetto	Cabbage Palm	14' ct	10'	10	Good	RELOCATE
12	Sabal palmetto	Cabbage Palm	16' ct	10'	10	Good	RELOCATE
13	Sabal palmetto	Cabbage Palm	20' ct	10'	12	Good	RELOCATE
14	Sabal palmetto Sabal palmetto	Cabbage Palm Cabbage Palm	20' ct	10'	12	Good	RELOCATE
15 16	Sabal palmetto	Cabbage Palm	14' ct	10' 10'	10 12	Good Good	RELOCATE
17	Sabal palmetto	Cabbage Palm	14 ct	10'	12	Good	RELOCATE
	Tabebuea heterophylla	Pink Trumpet Tree	25'	10'	6	Poor	demo
19	Bucidas burserus	Black Olive	40'	30'	12	Good	demo
20	Quercus ssp.	Oak	30'	45'	18	Good	REMAIN
21	Bursera simauruba	Gumbo Limbo	40'	30'	16	Good	REMAIN
22	Bucidas burserus	Black Olive	45'	40'	16	Good	REMAIN
23	Quercus virginiana	Live Oak	50'	30'	24	Good	REMAIN
24	Bucidas burserus	Black Olive	50'	30'	18	Good	REMAIN
25	Quercus virginiana	Live Oak	30'	20'	8	Good	REMAIN
26	Conocarpus e. sericeus	Silver Buttonwood	15'	15'	6	Good	REMAIN
27	Conocarpus e. sericeus	Silver Buttonwood	15'	15'	4	Good	REMAIN
28	Conocarpus e. sericeus	Silver Buttonwood	15'	15'	4	Good	REMAIN
29	Conocarpus e. sericeus	Silver Buttonwood	15'	15'	6	Good	REMAIN
30	Sabal palmetto	Cabbage Palm	16' ct	10'	10	Good	REMAIN
31	Cocos nucifera	Coconut Palm	25' ct	20'	8	Good	REMAIN
32 33	Cocos nucifera  Cocos nucifera	Coconut Palm Coconut Palm	25' ct 25' ct	20' 20'	8	Good Good	REMAIN RELOCATE
33 34	Bucidas burserus	Black Olive	30'	30'	14	Good	demo
35	Bucidas burserus	Black Olive	25'	15'	12	Fair	demo
36	Bucidas burserus	Black Olive	25'	25'	12	Fair	demo
37	Bucidas burserus	Black Olive	30'	25'	10	Fair	demo
38	Quercus virginiana	Live Oak	12'	6'	4	Poor	demo
39	Quercus virginiana	Live Oak	25'	25'	10	Fair	demo
40	Quercus virginiana	Live Oak	30'	30'	16	Fair	demo
41	Quercus virginiana	Live Oak	20'	15'	8	Fair	demo
42	Conocarpus e. sericeus	Silver Buttonwood	12'	12'	4	Good	RELOCATE
43	Conocarpus e. sericeus  Conocarpus e. sericeus	Silver Buttonwood Silver Buttonwood	10'	10' 10'	4	Good Good	RELOCATE
45	Conocarpus e. sericeus	Silver Buttonwood	8'	10'	4	Good	RELOCATE
46	Quercus virginiana	Live Oak	25'	25'	10	Fair	demo
47	Quercus virginiana	Live Oak	15'	10'	8	Fair	demo
48	Quercus ssp.	Oak	20'	20'	10	Fair	REMAIN
49	Quercus ssp.	Quercus ssp.	20'	20'	12	Fair	REMAIN
50	Quercus ssp.	Quercus ssp.	18'	10'	6	Fair	REMAIN
51	Quercus ssp.	Quercus ssp.	25'	25'	12	Fair	REMAIN
52	Quercus ssp.	Quercus ssp.	20'	15'	6	Fair	REMAIN
53	Ilex cassine	Holly	15'	10'	4	Fair	REMAIN
54	Quercus virginiana	Live Oak Holly	25' 15'	30'	24	Good	REMAIN
55 56	Ilex cassine Ilex cassine	Holly	15'	10' 10'	4	Poor Poor	REMAIN REMAIN
57	llex cassine	Holly	15'	10'	4	Poor	REMAIN
58	Ficus ssp.	Ficus	30'	30'	48	Good	REMAIN
59	Quercus ssp.	Oak	30'	25'	12	Fair	REMAIN
60	Quercus ssp.	Oak	30'	25'	10	Fair	REMAIN
61	Quercus ssp.	Oak	20'	20'	10	Fair	REMAIN
62	Quercus ssp.	Oak	25'	25'	18	Fair	REMAIN
63	Quercus ssp.	Oak	15'	15'	8	Fair	REMAIN
64	Quercus ssp.	Oak	25'	20'	10	Fair	REMAIN
65	Quercus ssp.	Oak TOTAL CALIPER	20'	15'	10	Fair	REMAIN
		INCHES TO					

## City of Hollywood, Florida -

## **Tree Removal and Tree Replacement Guidelines:**

(The Following Shall Apply Pursuant To "City of Holywood Landscape Manual, Section 4. - "Tree Preservation, Tree Removal and Tree Relocation Permits"; and the "City of Hollywood Land Development Regulations, Article 9, Section 9.9 "Existing Plant Materials"; and Are Reflected Upon The Tree Disposition/ Mitigation Plans (Sheet LD-1) and the "Landscape Planting Plans" (Sheets LP-1 thru LP-2) Accordingly. The Owner and/ or Contractor Shall Follow The Tree Replacement and Protection Guidelines, Within These Notes, As Well As The Aforementioned Codes.)

General Conditions/ Pre-Clearing Inspections: A Pre-Clearing Inspection Is Required Prior To The Initial Removal or Alteration of Any Vegetation In Order To Assure Proper Compliance With The Permit Conditions. A Post-Clearing Inspection is Required Prior to Issuance of The Final Certificate of Occupancy. All Native Vegetation Outside of The Development Area Shall Be Maintained In Place As Outlined On The Tree Disposition Site Plans.


Tree Protection Note: Contractors Shall Use Caution During Construction To Avoid Damaging Any Existing Trees Listed As To Remain. (1) Barriers Shall Enclose Area Inside The Outer Edge of Dripline; (2) Tree Protection Barrier Shall Be Conspicuous and High Enough To Be Easily Seen By Any Equipment Operators; (3) All Tree Protection Barrier Shall Be Constructed of Sturdy Scrap Wood (Four by Four Stock), or Other Sturdy Material (No Flagging or Ribbon Type Fencing Shall Be Allowed); (4) All Tree Protection Barriers To Be Completely Removed From Site At The End of Construction Period (Immediately Prior To Issuance of 'Certificate of Occupancy By The City of Hollywood Building Department) Unless Otherwise Stipulated.

Methodology of Tree Removals: No Heavy Equipment or Machinery Shall Be Used, Nor Shall Any Construction Activities or Grade Changes Occur Within The Radius of The Drip Line of Native Trees Which Shall Be Preserved In Place, Unless Specifically Approved In Writing By The City of Hollywood and/ or the Landscape Architect. Use of Any Chemical Treatments Shall Have Prior Approval By The City of Hollywood and the Landscape Architect Before Application. All Prohibited Species and/ or Invasive Species Shall Be Removed as Indicated Within The Limits of Contract Area or Property To Be Developed Accordingly, as per The City of Hollywood's Land Development Code.

Tree Locations/ Tree Removals and Tree Replacement Calculations: Refer To 'Sheet LD-1' For "Tree Location/ Tree Disposition Plans"; Trees That Are To Be Removed Must Be Mitigated For According To The Tree Credits Guidelines (Section 9.9.B of The City of Hollywood Land Development Code).

Maintenance and Monitoring Requirements: The Permit Holder Shall Be Responsible For Maintaining The Health of Any Replacement and/ or Relocated Trees For A Min. of One Year From Planting. Throughout The Monitoring Period, The Permit Holder Shall Maintain a (100%) Survivorship Rate For All Installed Replacement Trees. If During The Monitoring Periods, The Survival Rate of Any of The Plants Drops Below The Required Level, The Permit Holder Shall Have (15) Days To Plant A Sufficient Number of Additional Trees So As To Maintain The Required Survival Rate.

Tree Replacement Bond Requirement: Bonds May Be Required By The City of Hollywood For Tree Removal and/ or Tree Replacement Permits. Calculations For The Amount of Bonds For Non-Mature Trees Shall Be Computed Based Upon The Equivalent Canopy Replacement Criteria Applied To Each Tree To Be Relocated or Replaced and Upon The Cost of Installation and Maintenance. Determination of the Bond Amount For Mature Trees Shall Be Computed Based Upon The Most Current Version of the Guide For Plant Appraisal, Published By The International Society of Arboriculture. The Fair Market Value of the Cost of Trees That Would Be Required To Compensate For The Canopy To Be Relocated or Replaced Shall Be Posted.

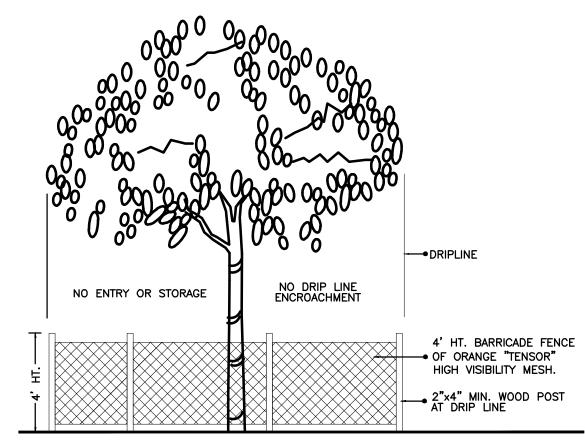

TREE PRESERVATION BARRICADE FENCING DETAIL

\*\*\*\*\*

COMMENT:

**SPORTS AUTHORITY** OAKWOOD PLAZA

CAD I.D.: F090068-LANDSCAPE DEMO PLAN

**KIMCO** 

REALTY CORP.

CITY OF HOLLYWOOD BROWARD COUNTY, FLORIDA



RADICE III 1000 CORPORATE DRIVE, SUITE 250 FORT LAUDERDALE, FL 33334 PH: (954) 202-7000 FX: (954) 202-7070

www.BohlerEngineering.com

MICHAEL D. GROSSWIRTH

PROFESSIONAL LANDSCAPE ARCHITECT
May 10, 2011
FLORIDA LICENSE No. 6666871
FLORIDA BUSINESS CERT. OF AUTH. No. 27528

LANDSCAPE **DEMOLITION PLAN** NOTES AND DETAILS

**LD-2**